

Designed to be built in the VM-2120/-2240 amplifiers, the SV-200MA permits monitoring of individual speaker line or power amplifier failures for status indication.




Order no: SV-200MA

Specifications

Power source	24 V DC (provided by VM-2000)
Dimensions (W x H x D)	90 x 20,6 x 157 mm
Dimensions (ø x D)	x 157 mm
Operating temperature	0 - 50 °C

Appearance

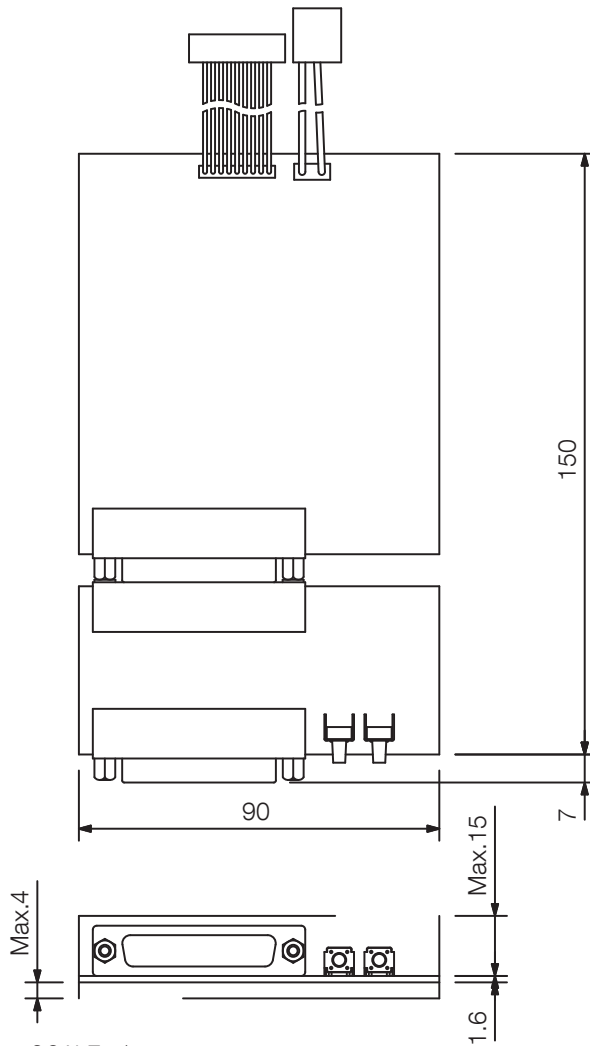

UNIT:mm

SCALE:1/2

Caution: about combination with SV-200MA and UL-adaptive speaker

The following UL-adaptive speakers can't use, because there is a possibilities to cause short circuit false detection.

- BS-680U
- CS-64U/154U/304U
- PC-580RU/580RVU
- SC-630U

Please contact your nearest TOA dealer about a UL-adaptive speaker which will be added from now on.