

TS-770

CENTRAL UNIT

The TS-770 is a Central unit for TOA Conference system, of which compact design makes it easy to install and store. Use of its line connection terminals permits connections to the conference units of TS-771, TS-772, and TS-775, making up a conference system. Up to 3 Central units can be connected.



Order no: TS-770 CE

Specifications

Power source	230 V AC, 50 / 60 Hz
Power consumption	Max. 60 W
Input / Output	Input: MIC: -60 dBV, 600 Ω , unbalanced, phone jack, AUX: -20 dBV, 10 k Ω , unbalanced, phone jack Output: Recording: -20 dBV, 10 k Ω , unbalanced, phone jack, pin jack \times 2
Connection	MIC: -60 dBV, 600 Ω , unbalanced, phone jackAUX: -20 dBV, 10 k Ω , unbalanced, phone jackRecording: -20 dBV, 10 k Ω , unbalanced, phone jack, pin jack \times 2Expansion Input and Output Terminal: Input: -20 dBV, 10 k Ω , pin jack \times 2Output: -20 dBV, 10 k Ω , pin jack \times 2Control: 10 k Ω or more, voltage output, pin jack \times 2
Dimensions (W x H x D)	210 x 107,1 x 316 mm
Dimensions (ϕ x D)	\times 316 mm
Finish	Aluminium, hairline, black


TS-770

CENTRAL UNIT


Appearance

Rear View


CE version

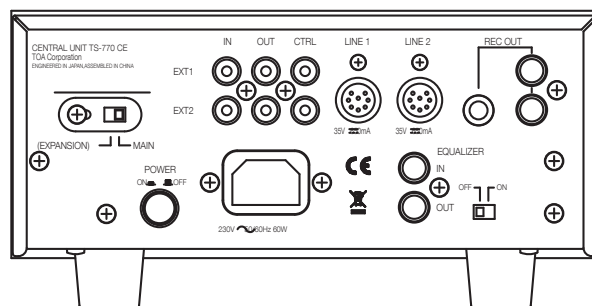



AC plug



CU version

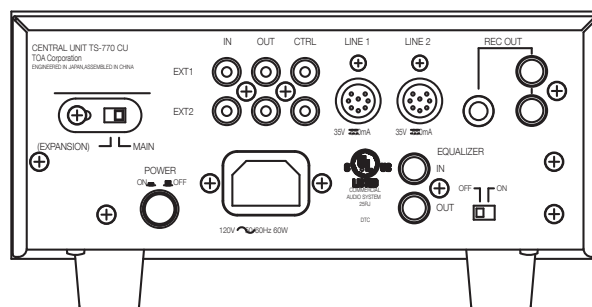

SA version

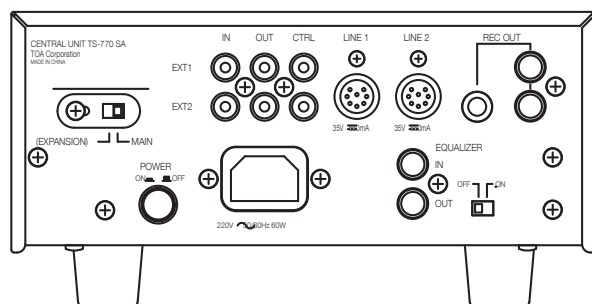

210 [8.27"]